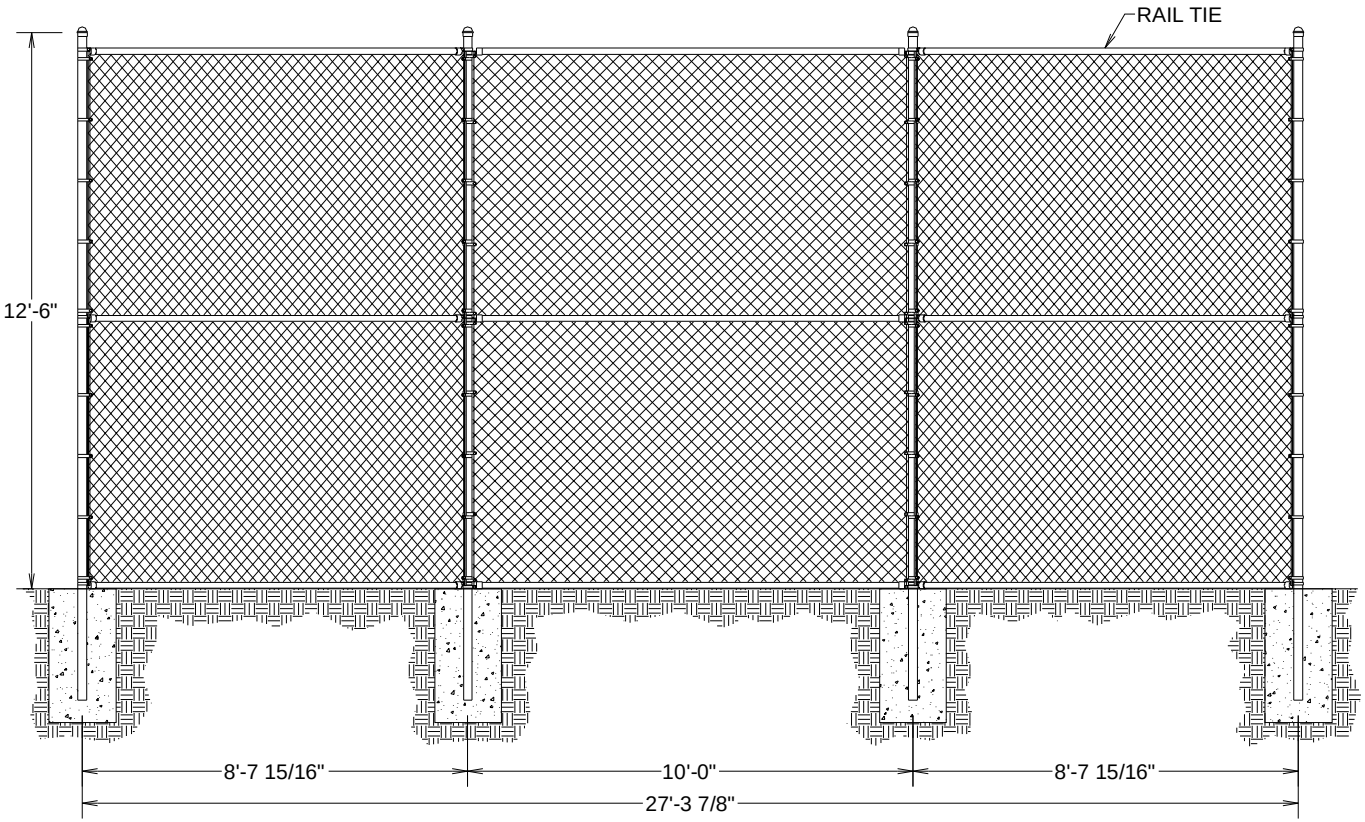

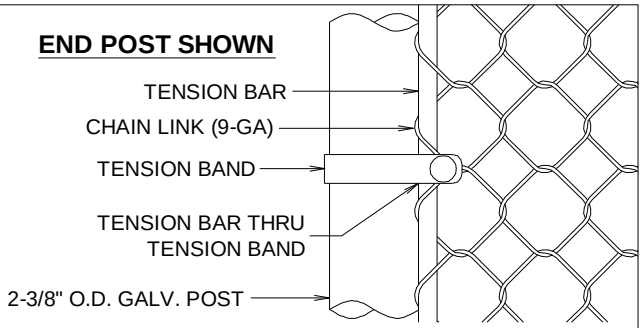

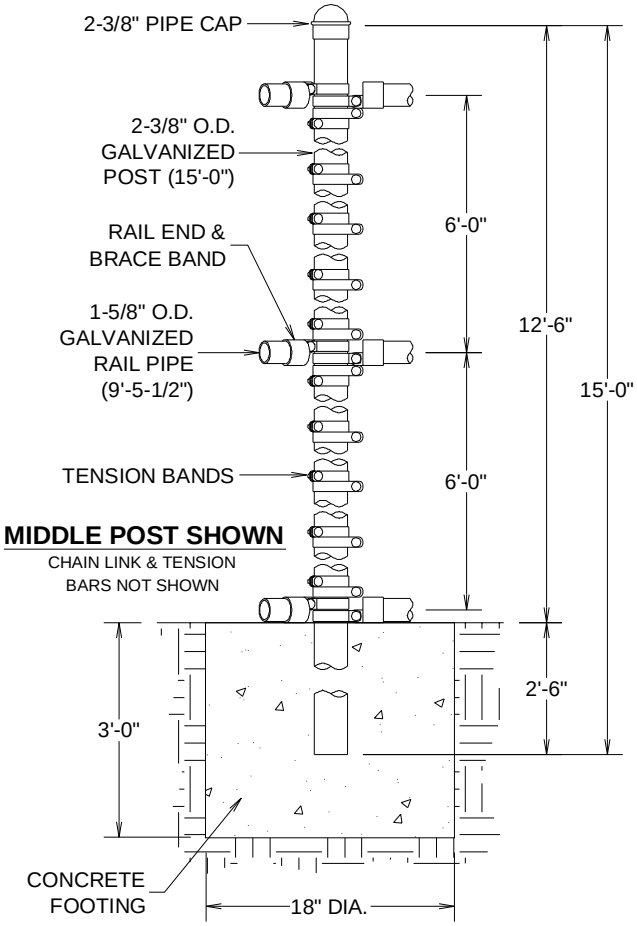

MIDDLE POST SHOWN
CHAIN LINK & TENSION BARS NOT SHOWN

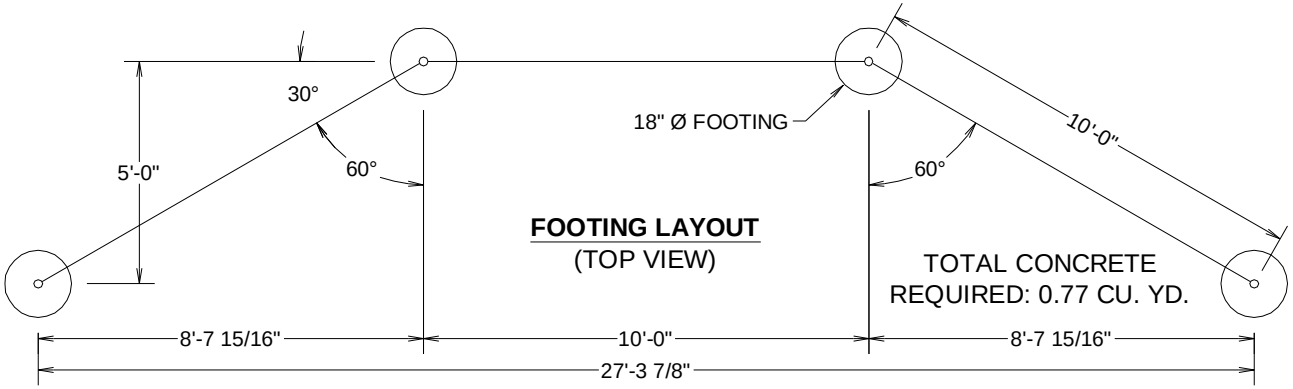

FOOTING LAYOUT
(TOP VIEW)

TOTAL CONCRETE REQUIRED: 0.77 CU. YD.

MATERIALS FIELD CUT BY INSTALLER

REVISION / STAGE:	MONTH / DAY / YEAR
BSB-303	

RELATED DRAWINGS / INFORMATION:

THIS DRAWING IS PROPERTY OF ARIZONA COURTLINES, INC. AND MAY NOT BE REPRODUCED WITHOUT WRITTEN PERMISSION

BSB-303
BASEBALL/SOFTBALL BACKSTOP 30'-0" 3-PANEL

- ☐ 2-3/8" Ø X 15'-0" GALV. PIPE (4)
- ☐ 1-5/8" Ø X 21'-0" GALV. PIPE (4)
- ☐ 1-5/8" Ø X 10'-0" GALV. PIPE (1)
- ☐ 2-3/8" PIPE CAP (4)
- ☐ 1-5/8" RAIL END (18)
- ☐ 2-3/8" BRACE BAND (18)
- ☐ TENSION BAR (3/16" X 3/4" X 142") (6)
- ☐ 2-3/8" TENSION BAND (60)
- ☐ 5/16"-18 X 1-1/4" CARRIAGE BOLT (78)
- ☐ 5/16"-18 HEX NUT (78)
- ☐ RAIL TIE (8-1/2" 11-GA) (60)
- ☐ CHAIN LINK (9-GA 12'-0" X 30'-0") (1)

ACI
ARIZONA COURTLINES, INC.
8742 NORTH 78TH AVENUE, PEORIA, ARIZONA 85345
TEL. 623.939.8126 FAX. 623.939.2526
www.ARIZONACOURTLINES.com

DRAWN BY:
EDDIE CAFFERATA

QUANTITY: _____