



**SPECIFICATIONS:**  
 ELECTRIC MOTOR: 1 H.P., 110 VOLT, 60 CYCLE, 13 FULL LOAD AMPS.  
 INSTANT REVERSE, LOW MAX CURRENT DRAW, THERMALLY PROTECTED.  
 HOLLOW-BORE DRIVE DRUM ACCEPTS 2-3/8" O.D. DRIVE PIPE.  
 72 DRUM REVOLUTIONS OR 45'-0" OF LIFT AT 13 FEET PER MINUTE.  
 1,000 INCH LBS. OF TORQUE LIFTS UP TO 800 LBS. OF CURTAIN FABRIC.  
 SELF LUBRICATING GEARS, LARGE DIAMETER BALL BEARINGS (DRUM).  
 DOUBLE, SELF-LOCKING WORM GEARING PLUS PASSIVE UNI-DIRECTION BRAKE.  
 HEAVY DUTY UP AND DOWN LIMIT SWITCHES, GEAR DRIVEN FOR ACCURACY.  
 PRECISION INTERLOCKING STEEL FRAME CONSTRUCTION, POWDER COATED.  
 64 LBS. TOTAL WEIGHT.

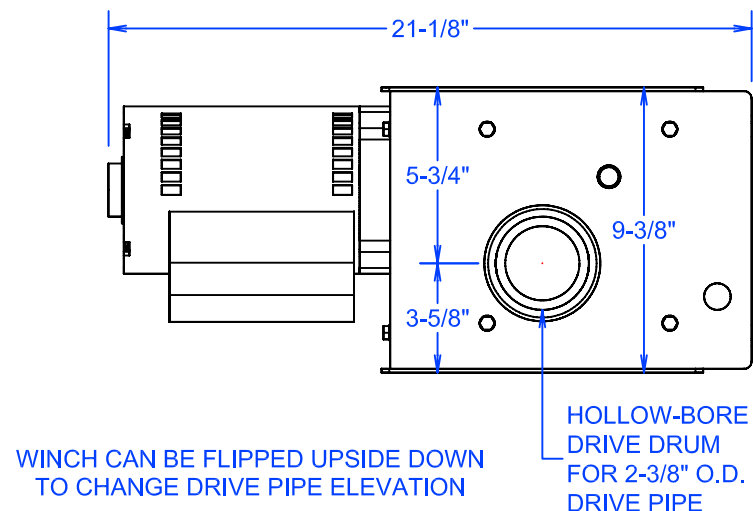

REVISION / STAGE:	MONTH / DAY / YEAR	RELATED DRAWINGS / INFORMATION:	DIVIDER CURTAIN MOTOR	ARIZONA COURTLINES, INC.  8742 NORTH 78TH AVENUE PEORIA, ARIZONA 85345 TEL. 623.939.8126 FAX. 623.939.2526 www.ARIZONACOURTLINES.com	DRAWN BY: EDDIE CAFFERATA
_____	_____				CHECKED BY:
_____	_____				
_____	_____				QUANTITY:
_____	_____				_____
DC-MOTOR		THIS DRAWING IS PROPERTY OF ARIZONA COURTLINES, INC. AND MAY NOT BE REPRODUCED WITHOUT WRITTEN PERMISSION	FOR ALL TYPES OF ELECTRIC DIVIDER CURTAINS		